



LA110

Applications

- ④ Touring performance
- ④ Theatre and multi-function hall
- ④ Church

Feature





- ④ Compact bi-amp system
- ④ Neodymium high-sensitivity driver, maximum headroom
- ④ Small enclosure, light, high SPL to Volume ratio

Technical specification


- ④ **FREQUENCY RESPONSE:** 60 Hz-18 kHz(± 3 dB) 50 Hz-20 kHz(-10 dB)
- ④ **NOMINAL COVERAGE** ^(-6dB): 100°(H) 10°(V) adjustable
- ④ **SENSITIVITY(@1w/1m):** HF:112 dB(2 kHz-16 kHz) LF:103 dB(500 Hz-2 kHz)
- ④ **POWER RATING(AES):** HF/LF:80W/350W
- ④ **NOMINAL IMPEDANCE:** HF/LF:16/16 ohm
- ④ **MAXIMUM SPL:** HF:137 dB LF:134 dB
- ④ **DRIVERS:**
LF 1 x 10" woofer
HF 1 x 3" compression driver

Physical data


- ④ **DIMENSIONS(HxWxD):** 308 x 580 x 390mm / 12"x23"x15"
- ④ **WEIGHT:** 22.5 kg / 50 lbs
- ④ **CONNECTORS:** 2 x NL4 connectors
- ④ **SPEAKER CABLES:** 1+1-...LF, 2+2+...HF
- ④ **MATERIALS:** 15mm, 18mm Baltic birch plywood
- ④ **FINISH:** Black polyurea paintings
- ④ **GRILLE:** Black epoxy mesh grille with acoustically reticulated cloth
- ④ **RIGGING:** 0, 1, 2, 3, 4, 5, 7.5, 10degree adjustable

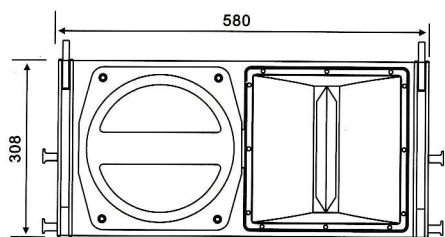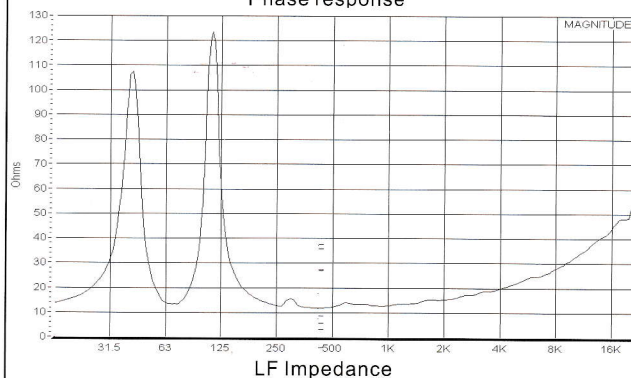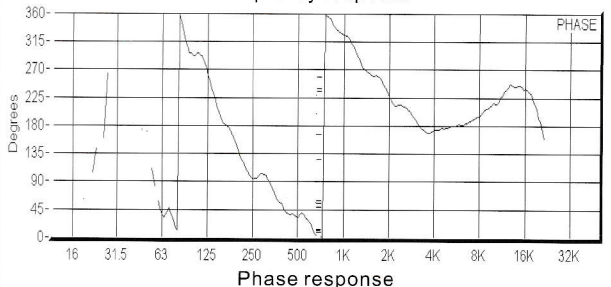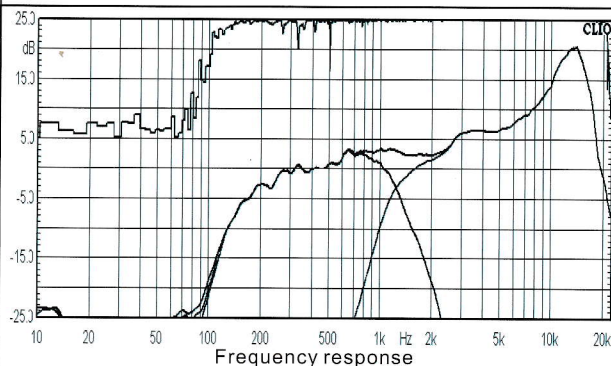

Front

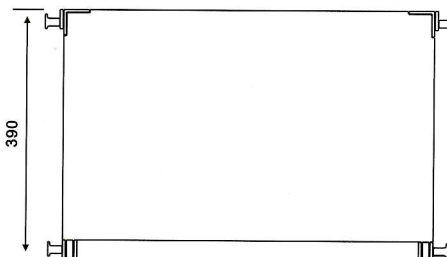

Top



Side